



DinliteTM

德清鼎辉照明有限公司

DEQING DINGHUI LIGHT CO.,LTD.

Professional Lighting

E-mail:zhshy2008@126.com

HTTP://www.dinlite.com

德清鼎辉照明有限公司

DEQING DINGHUI LIGHT CO.,LTD.

公司简介

德清鼎辉照明有限公司，企业成立于1978年，是我国最早生产白炽灯泡的企业之一，是浙江省电光源协会会员之一。2000年与韩国企业成立合资公司，专业生产电光源产品，我公司现有固定资产1300多万元，公司占地面积9000多平方米。拥有韩国、台湾自动生产线共9条，半自动生产线5条；公司员工250多人，年生产灯泡4000多万只。

现公司主要产品有白炽灯泡：透明、磨砂、彩色、喷金、喷砂系列的球型泡、烛形泡、反射泡、梨形泡、普泡及冰箱指示泡、300℃高温烤箱指示泡、微波炉指示泡、及各种非照明装饰灯泡和工艺泡等；红外线加热灯和紫外线装饰灯；节能卤素灯；传统LED灯等。公司生产的特种灯泡品种多、质量好、档次高、信誉优，产品90%出口海外，如西欧、北美、大洋洲、中东、南美等，深受国内外客户欢迎。

公司座落于风景秀丽的江南古城—德清。京杭运河、宣杭铁路、104国道、杭宁高速公路贯穿而过，交通十分方便。优美的自然环境也极宜产品生产与销售。为促进技术进步和光源新产品的开发，我公司与电光源研究所、高等院校、科研单位和专家有着广泛的联系和合作。

公司全体员工将以不断进取攀登电光源新高峰为目标，严守“质量第一，信誉至上”的宗旨，竭诚为国内外用户提供优质服务。

COMPANY PROFILE

Deqing Dinghui Light Co., Ltd. was found in 1978. One of the earliest factory who produce Incandescent bulb in China. Also we are the member of Electric lighting association of Zhejiang. In 2000, we build as joint venture enterprise with South Korea company, produce Electric lighting goods professionally. Now we have permanent assets about US\$2 million, cover an area of 9000m². Totally 9 auto production lines from Korea and Taiwan and 5 semi-auto production lines. With employee around 250, our annual production capacity reach 40million piece bulbs.

Our mainly product include: Incandescent bulb with various type as globe, candle, reflector, pear, normal, appliance indicator (fridge/oven/microwave oven) and so many decoration and craft bulbs, with clear/frost/color/golden/ice etc. finishing; Infrared heating lamp and ultraviolet bulbs; Eco Halogen traditional bulbs; LED traditional bulbs and so on. By various kinds, good quality, high level, fine prestige, nearly 90% products are exported all over the world, such as West Europe, North America, Oceania, Mid-East, South America etc.

Our factory is located in Deqing County which is a beautiful and old city, 160 km from Shanghai, 280 km from Nanjing and 39km from the provincial capital: Hangzhou. Grand Canal, Xuanzhou-Hangzhou railway, 104 National road, Hangzhou-Nanjing expressway and other in-build expressway all cut through the city. Transportation is very convenient. In order to improve technique and develop new lighting product, we have good connection and cooperation with lighting institute, university, and famous experts.

With good reputation among our clients all over the world, we are very glad to be your long-term business partner and friend.



HTTP://www.dinlite.com



普泡系列

Normal Bulb



Item	Type	Voltage (V)	Wattage (W)	Luminous Flux (LM)	Color	Base	Diameter	Length	Life (H)
15A15CL	A15	110-240	15	100	Clear	E26/E27/B22	48	87	1000
25A15CL	A15	110-240	25	207	Clear	E26/E27/B22	48	87	1000
40A15CL	A15	110-240	40	389	Clear	E26/E27/B22	48	87	1000
60A15CL	A15	110-240	60	654	Clear	E26/E27/B22	48	87	1000



Item	Type	Voltage (V)	Wattage (W)	Luminous Flux (LM)	Color	Base	Diameter	Length	Life (H)
15A15FR	A15	110-240	15	100	Frost	E26/E27/B22	48	87	1000
25A15FR	A15	110-240	25	207	Frost	E26/E27/B22	48	87	1000
40A15FR	A15	110-240	40	389	Frost	E26/E27/B22	48	87	1000
60A15FR	A15	110-240	60	654	Frost	E26/E27/B22	48	87	1000



Item	Type	Voltage (V)	Wattage (W)	Luminous Flux (LM)	Color	Base	Diameter	Length	Life (H)
15A19CL	A19	110-240	15	100	Clear	E26/E27/B22	60	105	1000
25A19CL	A19	110-240	25	207	Clear	E26/E27/B22	60	105	1000
40A19CL	A19	110-240	40	389	Clear	E26/E27/B22	60	105	1000
60A19CL	A19	110-240	60	654	Clear	E26/E27/B22	60	105	1000
75A19CL	A19	110-240	75	864	Clear	E26/E27/B22	60	105	1000
100A19CL	A19	110-240	100	1250	Clear	E26/E27/B22	60	105	1000



Item	Type	Voltage (V)	Wattage (W)	Luminous Flux (LM)	Color	Base	Diameter	Length	Life (H)
15A19FR	A19	110-240	15	100	Frost	E26/E27/B22	60	105	1000
25A19FR	A19	110-240	25	207	Frost	E26/E27/B22	60	105	1000
40A19FR	A19	110-240	40	389	Frost	E26/E27/B22	60	105	1000
60A19FR	A19	110-240	60	654	Frost	E26/E27/B22	60	105	1000
75A19FR	A19	110-240	75	864	Frost	E26/E27/B22	60	105	1000
100A19FR	A19	110-240	100	1250	Frost	E26/E27/B22	60	105	1000



Item	Type	Voltage (V)	Wattage (W)	Luminous Flux (LM)	Color	Base	Diameter	Length	Life (H)
15A19SW	A19	110-240	15	90	Soft White	E26/E27/B22	60	105	1000
25A19SW	A19	110-240	25	186	Soft White	E26/E27/B22	60	105	1000
40A19SW	A19	110-240	40	350	Soft White	E26/E27/B22	60	105	1000
60A19SW	A19	110-240	60	580	Soft White	E26/E27/B22	60	105	1000
75A19SW	A19	110-240	75	777	Soft White	E26/E27/B22	60	105	1000
100A19SW	A19	110-240	100	1125	Soft White	E26/E27/B22	60	105	1000



Item	Type	Voltage (V)	Wattage (W)	Luminous Flux (LM)	Color	Base	Diameter	Length	Life (H)
40A19SC	A19	110-240	40	N/A	Silver Crown	E26/E27/B22	60	105	1000
60A19SC	A19	110-240	60	N/A	Silver Crown	E26/E27/B22	60	105	1000
40A19SCG	A19	110-240	40	N/A	Silver Crown Gold	E26/E27/B22	60	105	1000
60A19SCG	A19	110-240	60	N/A	Silver Crown Gold	E26/E27/B22	60	105	1000



Item	Type	Voltage (V)	Wattage (W)	Luminous Flux (LM)	Color	Base	Diameter	Length	Life (H)
25A19CR	A19	110-240	25	N/A	Color	E26/E27/B22	60	105	1000
40A19CR	A19	110-240	40	N/A	Color	E26/E27/B22	60	105	1000



Item	Type	Voltage (V)	Wattage (W)	Luminous Flux (LM)	Color	Base	Diameter	Length	Life (H)
75A19BL	A19	110-240	75	N/A	Blacklight	E26/E27/B22	60	105	1000



Item	Type	Voltage (V)	Wattage (W)	Luminous Flux (LM)	Color	Base	Diameter	Length	Life (H)
60A19AI	A19	110-240	60	N/A	Anti-insect	E26/E27/B22	60	105	1000



Item	Type	Voltage (V)	Wattage (W)	Luminous Flux (LM)	Color	Base	Diameter	Length	Life (H)
60A19DL	A19	110-240	60	N/A	Daylight	E26/E27/B22	60	105	1000



Item	Type	Voltage (V)	Wattage (W)	Luminous Flux (LM)	Color	Base	Diameter	Length	Life (H)
100A21CL	A21	110-240	100	1250	Clear	E26/E27/B22	66	130	1000



Item	Type	Voltage (V)	Wattage (W)	Luminous Flux (LM)	Color	Base	Diameter	Length	Life (H)
100A21FR	A21	110-240	100	1250	Frost	E26/E27/B22	66	130	1000



Item	Type	Voltage (V)	Wattage (W)	Luminous Flux (LM)	Color	Base	Diameter	Length	Life (H)
100A21SW	A21	110-240	100	1125	Soft white	E26/E27/B22	66	130	1000



Item	Type	Voltage (V)	Wattage (W)	Luminous Flux (LM)	Color	Base	Diameter	Length	Life (H)
100A21SC	A21	110-240	100	N/A	Silver crown	E26/E27/B22	66	130	1000



Item	Type	Voltage (V)	Wattage (W)	Luminous Flux (LM)	Color	Base	Diameter	Length	Life (H)
100A25CL	A25	110-240	100	1250	Clear	E26/E27/B22	80	148	1000



Item	Type	Voltage (V)	Wattage (W)	Luminous Flux (LM)	Color	Base	Diameter	Length	Life (H)
100A25FR	A25	110-240	100	1250	Frost	E26/E27/B22	80	148	1000



Item	Type	Voltage (V)	Wattage (W)	Luminous Flux (LM)	Color	Base	Diameter	Length	Life (H)
150PS25CL	PS25	110-240	150	2200	Clear	E26/E27/B22	80	175	1000



Item	Type	Voltage (V)	Wattage (W)	Luminous Flux (LM)	Color	Base	Diameter	Length	Life (H)
150PS25FR	PS25	110-240	150	2200	Frost	E26/E27/B22	80	175	1000



Item	Type	Voltage (V)	Wattage (W)	Luminous Flux (LM)	Color	Base	Diameter	Length	Life (H)
300PS30CL	PS30	110-240	300	3600	Clear	E26/E27/B22/E39/E40	95	195	1000



Item	Type	Voltage (V)	Wattage (W)	Luminous Flux (LM)	Color	Base	Diameter	Length	Life (H)
300PS30FR	PS30	110-240	300	3600	Frost	E26/E27/B22/E39/E40	95	195	1000



Item	Type	Voltage (V)	Wattage (W)	Luminous Flux (LM)	Color	Base	Diameter	Length	Life (H)
300PS35CL	PS35	110-240	300	3600	Clear	E39/E40	110	238	1000
500PS35CL	PS35	110-240	500	6500	Clear	E39/E40	110	238	1000



Item	Type	Voltage (V)	Wattage (W)	Luminous Flux (LM)	Color	Base	Diameter	Length	Life (H)
300PS35FR	PS35	110-240	300	3600	Frost	E39/E40	110	238	1000
500PS35FR	PS35	110-240	500	6500	Frost	E39/E40	110	238	1000

管形泡系列

Tubular Bulb



Item	Type	Voltage (V)	Wattage (W)	Luminous Flux (LM)	Color	Base	Diameter	Length	Life (H)
15T13CL	T13	110-240	15	70	Clear	E12	13	41	1000



Item	Type	Voltage (V)	Wattage (W)	Luminous Flux (LM)	Color	Base	Diameter	Length	Life (H)
15T16CL	T16	110-240	15	75	Clear	E12/E14/BA15D	16	47	1000



Item	Type	Voltage (V)	Wattage (W)	Luminous Flux (LM)	Color	Base	Diameter	Length	Life (H)
10T17CL	T17	110-240	10	75	Clear	E12/E14/BA15D	17	52	1000
15T17CL	T17	110-240	15	100	Clear	E12/E14/BA15D	17	52	1000



Item	Type	Voltage (V)	Wattage (W)	Luminous Flux (LM)	Color	Base	Diameter	Length	Life (H)
7T18CL	T18	110-240	7	40	Clear	E12/E14/BA15D	18	55	1000
10T18CL	T18	110-240	10	75	Clear	E12/E14/BA15D	18	55	1000
15T18CL	T18	110-240	15	100	Clear	E12/E14/BA15D	18	55	1000
25T18CL	T18	110-240	25	160	Clear	E12/E14/BA15D	18	55	1000



Item	Type	Voltage (V)	Wattage (W)	Luminous Flux (LM)	Color	Base	Diameter	Length	Life (H)
15T19CL	T19	110-240	15	100	Clear	E12/E14/BA15D	19	57	1000



Item	Type	Voltage (V)	Wattage (W)	Luminous Flux (LM)	Color	Base	Diameter	Length	Life (H)
15T20CL	T20	110-240	15	70	Clear	E12/E14/BA15D	20	51	1000
15T20CL	T20	110-240	15	75	Clear	E12/E14/BA15D	20	70	1000
25T20CL	T20	110-240	25	160	Clear	E12/E14/BA15D	20	100	1000
25T20CL	T20	110-240	25	160	Clear	E12/E14/BA15D	20	135	1000



Item	Type	Voltage (V)	Wattage (W)	Luminous Flux (LM)	Color	Base	Diameter	Length	Life (H)
25T20FR	T20	110-240	25	150	Frost	E12/E14/BA15D	20	135	1000




Item	Type	Voltage (V)	Wattage (W)	Luminous Flux (LM)	Color	Base	Diameter	Length	Life (H)
15T22CL 300°C	T22	110-240	15	85	Clear	E12/E14/BA15D	22	47	1000



Item	Type	Voltage (V)	Wattage (W)	Luminous Flux (LM)	Color	Base	Diameter	Length	Life (H)
15T22CL	T22	110-240	15	70	Clear	E12/E14/BA15D	22	58	1000
20T22CL	T22	110-240	20	80	Clear	E12/E14/BA15D	22	58	1000
25T22CL	T22	110-240	25	160	Clear	E12/E14/BA15D	22	58	1000



Item	Type	Voltage (V)	Wattage (W)	Luminous Flux (LM)	Color	Base	Diameter	Length	Life (H)
25T25CL	T25	110-240	25	207	Clear	E12/E14/BA15D	25	80	1000
40T25CL	T25	110-240	40	389	Clear	E12/E14/BA15D	25	80	1000



Item	Type	Voltage (V)	Wattage (W)	Luminous Flux (LM)	Color	Base	Diameter	Length	Life (H)
25DT25SW	T25	110-240	25	175	Soft white	S15	25	221	1000
40DT25SW	T25	110-240	40	280	Soft white	S15	25	221	1000



Item	Type	Voltage (V)	Wattage (W)	Luminous Flux (LM)	Color	Base	Diameter	Length	Life (H)
25T30CL	T30	110-240	25	207	Clear	E26/B22	30	107	1000
40T30CL	T30	110-240	40	389	Clear	E26/B22	30	107	1000



Item	Type	Voltage (V)	Wattage (W)	Luminous Flux (LM)	Color	Base	Diameter	Length	Life (H)
25T30FR	T30	110-240	25	190	Frost	E26/B22	30	90	1000
40T30FR	T30	110-240	40	360	Frost	E26/B22	30	90	1000



Item	Type	Voltage (V)	Wattage (W)	Luminous Flux (LM)	Color	Base	Diameter	Length	Life (H)
35ST30SW	T30	110-240	35	240	Soft white	S14d	30	300	1000
60ST30SW	T30	110-240	60	420	Soft white	S14d	30	500	1000
35DT30SW	T30	110-240	35	240	Soft white	S14s	30	300	1000
60DT30SW	T30	110-240	60	420	Soft white	S14s	30	500	1000
120DT30SW	T30	110-240	120	840	Soft white	S14s	30	1000	1000



Item	Type	Voltage (V)	Wattage (W)	Luminous Flux (LM)	Color	Base	Diameter	Length	Life (H)
25T32DL	T32	110-240	25	N/A	Daylight	E26/B22	32	126	1000
25T32B	T32	110-240	25	N/A	Blue	E26/B22	32	126	1000
25T32BL	T32	110-240	25	N/A	Blacklight	E26/B22	32	126	1000



Item	Type	Voltage (V)	Wattage (W)	Luminous Flux (LM)	Color	Base	Diameter	Length	Life (H)
25T38CL	T38	110-240	25	160	Clear	E27/B22	38	120	1000
40T38CL	T38	110-240	40	250	Clear	E27/B22	38	120	1000

Tubulars

DEQING DINGHUI LIGHT CO.,LTD.



Item	Type	Voltage (V)	Wattage (W)	Luminous Flux (LM)	Color	Base	Diameter	Length	Life (H)
40DT38SW	T38	110-240	40	280	Soft white	S19	38	309	1000
60DT38SW	T38	110-240	60	420	Soft white	S19	38	309	1000
75DT38SW	T38	110-240	75	520	Soft white	S19	38	309	1000



Item	Type	Voltage (V)	Wattage (W)	Luminous Flux (LM)	Color	Base	Diameter	Length	Life (H)
15ST23CL	ST23	110-240	15	100	Clear	E12/E14/BA15D	23	48	1000



Item	Type	Voltage (V)	Wattage (W)	Luminous Flux (LM)	Color	Base	Diameter	Length	Life (H)
15ST25CL	ST25	110-240	15	100	Clear	E12/E14/BA15D	25	60	1000
25ST25CL	ST25	110-240	25	207	Clear	E12/E14/BA15D	25	60	1000



Item	Type	Voltage (V)	Wattage (W)	Luminous Flux (LM)	Color	Base	Diameter	Length	Life (H)
15ST25OR	ST25	110-240	15	N/A	Outside Red	E12/E14/BA15D	25	60	1000
15ST25OY	ST25	110-240	15	N/A	Outside Yellow	E12/E14/BA15D	25	60	1000
15ST25OB	ST25	110-240	15	N/A	Outside Blue	E12/E14/BA15D	25	60	1000
15ST25OG	ST25	110-240	15	N/A	Outside Green	E12/E14/BA15D	25	60	1000



Item	Type	Voltage (V)	Wattage (W)	Luminous Flux (LM)	Color	Base	Diameter	Length	Life (H)
15ST26CL	ST26	110-240	15	100	Clear	E12/E14/BA15D	26	62	1000
25ST26CL	ST26	110-240	25	207	Clear	E12/E14/BA15D	26	62	1000



Item	Type	Voltage (V)	Wattage (W)	Luminous Flux (LM)	Color	Base	Diameter	Length	Life (H)
15ST28CL	ST28	110-240	15	100	Clear	E12/E14/BA15D	28	64	1000
25ST28CL	ST28	110-240	25	207	Clear	E12/E14/BA15D	28	64	1000

烛泡系列

Candle Bulb



Item	Type	Voltage (V)	Wattage (W)	Luminous Flux (LM)	Color	Base	Diameter	Length	Life (H)
7C22CL	C22	110-240	7	40	Clear	E12/E14	22	54	1000
10C22CL	C22	110-240	10	75	Clear	E12/E14	22	54	1000
15C22CL	C22	110-240	15	90	Clear	E12/E14	22	54	1000



Item	Type	Voltage (V)	Wattage (W)	Luminous Flux (LM)	Color	Base	Diameter	Length	Life (H)
7C22CR	C22	110-240	7	N/A	Color	E12/E14	22	54	1000
10C22CR	C22	110-240	10	N/A	Color	E12/E14	22	54	1000
15C22CR	C22	110-240	15	N/A	Color	E12/E14	22	54	1000



Item	Type	Voltage (V)	Wattage (W)	Luminous Flux (LM)	Color	Base	Diameter	Length	Life (H)
7CA22CL	CA22	110-240	7	40	Clear	E12/E14	22	75	1000
10CA22CL	CA22	110-240	10	75	Clear	E12/E14	22	75	1000
15CA22CL	CA22	110-240	15	90	Clear	E12/E14	22	75	1000



Item	Type	Voltage (V)	Wattage (W)	Luminous Flux (LM)	Color	Base	Diameter	Length	Life (H)
3CF22CL	CF22	110-240	3	0.4	Clear	E12/E14	22	54	1000



Item	Type	Voltage (V)	Wattage (W)	Luminous Flux (LM)	Color	Base	Diameter	Length	Life (H)
7C26CL	C26	110-240	7	40	Clear	E12/E14	26	82	1000
10C26CL	C26	110-240	10	75	Clear	E12/E14	26	82	1000
15C26CL	C26	110-240	15	100	Clear	E12/E14	26	82	1000



Item	Type	Voltage (V)	Wattage (W)	Luminous Flux (LM)	Color	Base	Diameter	Length	Life (H)
10CA26CL	CA26	110-240	10	75	Clear	E12/E14	26	88	1000
15CA26CL	CA26	110-240	15	100	Clear	E12/E14	26	88	1000
25CA26CL	CA26	110-240	25	207	Clear	E12/E14	26	88	1000



Item	Type	Voltage (V)	Wattage (W)	Luminous Flux (LM)	Color	Base	Diameter	Length	Life (H)
10CA26FR	CA26	110-240	10	75	Frost	E12/E14	26	88	1000
15CA26FR	CA26	110-240	15	100	Frost	E12/E14	26	88	1000
25CA26FR	CA26	110-240	25	207	Frost	E12/E14	26	88	1000



Item	Type	Voltage (V)	Wattage (W)	Luminous Flux (LM)	Color	Base	Diameter	Length	Life (H)
3CAF26CL	CAF26	110-240	3	0.4	Clear	E12/E14	26	88	1000



Item	Type	Voltage (V)	Wattage (W)	Luminous Flux (LM)	Color	Base	Diameter	Length	Life (H)
15CA30CL	CA30	110-240	15	100	Clear	E12/E14	30	120	1000
25CA30CL	CA30	110-240	25	207	Clear	E12/E14	30	120	1000
40CA30CL	CA30	110-240	40	389	Clear	E12/E14	30	120	1000
60CA30CL	CA30	110-240	60	654	Clear	E12/E14	30	120	1000



Item	Type	Voltage (V)	Wattage (W)	Luminous Flux (LM)	Color	Base	Diameter	Length	Life (H)
15CA30FR	CA30	110-240	15	100	Frost	E12/E14	30	120	1000
25CA30FR	CA30	110-240	25	207	Frost	E12/E14	30	120	1000
40CA30FR	CA30	110-240	40	389	Frost	E12/E14	30	120	1000
60CA30FR	CA30	110-240	60	654	Frost	E12/E14	30	120	1000



Item	Type	Voltage (V)	Wattage (W)	Luminous Flux (LM)	Color	Base	Diameter	Length	Life (H)
3CF30CL	CF30	110-240	3	0.4	Clear	E12/E14	30	71	1000



Item	Type	Voltage (V)	Wattage (W)	Luminous Flux (LM)	Color	Base	Diameter	Length	Life (H)
25C32CL	C32	110-240	25	207	Clear	E12/E14/E26/E27/B22	32	93	1000
40C32CL	C32	110-240	40	389	Clear	E12/E14/E26/E27/B22	32	93	1000
60C32CL	C32	110-240	60	654	Clear	E12/E14/E26/E27/B22	32	93	1000



Item	Type	Voltage (V)	Wattage (W)	Luminous Flux (LM)	Color	Base	Diameter	Length	Life (H)
25C32FR	C32	110-240	25	207	Frost	E12/E14/E26/E27/B22	32	93	1000
40C32FR	C32	110-240	40	389	Frost	E12/E14/E26/E27/B22	32	93	1000
60C32FR	C32	110-240	60	654	Frost	E12/E14/E26/E27/B22	32	93	1000



Item	Type	Voltage (V)	Wattage (W)	Luminous Flux (LM)	Color	Base	Diameter	Length	Life (H)
25C32SW	C32	110-240	25	186	Soft White	E12/E14/E26/E27/B22	32	93	1000
40C32SW	C32	110-240	40	350	Soft White	E12/E14/E26/E27/B22	32	93	1000
60C32SW	C32	110-240	60	580	Soft White	E12/E14/E26/E27/B22	32	93	1000



Item	Type	Voltage (V)	Wattage (W)	Luminous Flux (LM)	Color	Base	Diameter	Length	Life (H)
25CA32CL	CA32	110-240	25	207	Clear	E12/E14/E26/E27/B22	32	100	1000
40CA32CL	CA32	110-240	40	389	Clear	E12/E14/E26/E27/B22	32	100	1000
60CA32CL	CA32	110-240	60	654	Clear	E12/E14/E26/E27/B22	32	100	1000



Item	Type	Voltage (V)	Wattage (W)	Luminous Flux (LM)	Color	Base	Diameter	Length	Life (H)
25CA32FR	CA32	110-240	25	207	Frost	E12/E14/E26/E27/B22	32	100	1000
40CA32FR	CA32	110-240	40	389	Frost	E12/E14/E26/E27/B22	32	100	1000
60CA32FR	CA32	110-240	60	654	Frost	E12/E14/E26/E27/B22	32	100	1000



Item	Type	Voltage (V)	Wattage (W)	Luminous Flux (LM)	Color	Base	Diameter	Length	Life (H)
25CP33CL	C33	110-240	25	207	Clear	E14	33	115	1000
40CP33CL	C33	110-240	40	389	Clear	E14	33	115	1000



Item	Type	Voltage (V)	Wattage (W)	Luminous Flux (LM)	Color	Base	Diameter	Length	Life (H)
25C34TCL	C34	110-240	25	207	Clear	E14	34	117	1000
40C34TCL	C34	110-240	40	389	Clear	E14	34	117	1000
60C34TCL	C34	110-240	60	654	Clear	E14	34	117	1000



Item	Type	Voltage (V)	Wattage (W)	Luminous Flux (LM)	Color	Base	Diameter	Length	Life (H)
25C34TFR	C34	110-240	25	207	Frost	E14	34	117	1000
40C34TFR	C34	110-240	40	389	Frost	E14	34	117	1000
60C34TFR	C34	110-240	60	654	Frost	E14	34	117	1000



Item	Type	Voltage (V)	Wattage (W)	Luminous Flux (LM)	Color	Base	Diameter	Length	Life (H)
25C34TGD	C34	110-240	25	207	Gold	E14	34	117	1000
40C34TGD	C34	110-240	40	389	Gold	E14	34	117	1000
60C34TGD	C34	110-240	60	654	Gold	E14	34	117	1000



Item	Type	Voltage (V)	Wattage (W)	Luminous Flux (LM)	Color	Base	Diameter	Length	Life (H)
25C35CL	C35	110-240	25	207	Clear	E14/E26/E27/B22	35	97	1000
40C35CL	C35	110-240	40	389	Clear	E14/E26/E27/B22	35	97	1000
60C35CL	C35	110-240	60	654	Clear	E14/E26/E27/B22	35	97	1000



Item	Type	Voltage (V)	Wattage (W)	Luminous Flux (LM)	Color	Base	Diameter	Length	Life (H)
25C35FR	C35	110-240	25	207	Frost	E14/E26/E27/B22	35	97	1000
40C35FR	C35	110-240	40	389	Frost	E14/E26/E27/B22	35	97	1000
60C35FR	C35	110-240	60	654	Frost	E14/E26/E27/B22	35	97	1000



Item	Type	Voltage (V)	Wattage (W)	Luminous Flux (LM)	Color	Base	Diameter	Length	Life (H)
25C35SW	C35	110-240	25	186	Soft White	E14/E26/E27/B22	35	97	1000
40C35SW	C35	110-240	40	350	Soft White	E14/E26/E27/B22	35	97	1000
60C35SW	C35	110-240	60	580	Soft White	E14/E26/E27/B22	35	97	1000



Item	Type	Voltage (V)	Wattage (W)	Luminous Flux (LM)	Color	Base	Diameter	Length	Life (H)
25C35CR	C35	110-240	25	N/A	Color	E14/E26/E27/B22	35	97	1000
40C35CR	C35	110-240	40	N/A	Color	E14/E26/E27/B22	35	97	1000



Item	Type	Voltage (V)	Wattage (W)	Luminous Flux (LM)	Color	Base	Diameter	Length	Life (H)
25C35GD	C35	110-240	25	207	Gold	E14/E26/E27/B22	35	97	1000
40C35GD	C35	110-240	40	389	Gold	E14/E26/E27/B22	35	97	1000
60C35GD	C35	110-240	60	654	Gold	E14/E26/E27/B22	35	97	1000



Item	Type	Voltage (V)	Wattage (W)	Luminous Flux (LM)	Color	Base	Diameter	Length	Life (H)
25C35ICC	C35	110-240	25	145	Ice-crystal Clear	E14/E26/E27/B22	35	97	1000
40C35ICC	C35	110-240	40	272	Ice-crystal Clear	E14/E26/E27/B22	35	97	1000
60C35ICC	C35	110-240	60	458	Ice-crystal Clear	E14/E26/E27/B22	35	97	1000



Item	Type	Voltage (V)	Wattage (W)	Luminous Flux (LM)	Color	Base	Diameter	Length	Life (H)
25C35ICA	C35	110-240	25	125	Ice-crystal Amber	E14/E26/E27/B22	35	97	1000
40C35ICA	C35	110-240	40	233	Ice-crystal Amber	E14/E26/E27/B22	35	97	1000
60C35ICA	C35	110-240	60	392	Ice-crystal Amber	E14/E26/E27/B22	35	97	1000



Item	Type	Voltage (V)	Wattage (W)	Luminous Flux (LM)	Color	Base	Diameter	Length	Life (H)
25C35KIC	C35	110-240	25	207	Kroko-ice Clear	E14/E26/E27/B22	35	97	1000
40C35KIC	C35	110-240	40	389	Kroko-ice Clear	E14/E26/E27/B22	35	97	1000
60C35KIC	C35	110-240	60	654	Kroko-ice Clear	E14/E26/E27/B22	35	97	1000



Item	Type	Voltage (V)	Wattage (W)	Luminous Flux (LM)	Color	Base	Diameter	Length	Life (H)
25C35KIG	C35	110-240	25	207	Kroko-ice Gold	E14/E26/E27/B22	35	97	1000
40C35KIG	C35	110-240	40	389	Kroko-ice Gold	E14/E26/E27/B22	35	97	1000
60C35KIG	C35	110-240	60	654	Kroko-ice Gold	E14/E26/E27/B22	35	97	1000



Item	Type	Voltage (V)	Wattage (W)	Luminous Flux (LM)	Color	Base	Diameter	Length	Life (H)
3CF35CL	C35	110-240	3	0.4	Clear	E14/E26/E27/B22	35	97	1000
3CF35OR	C35	110-240	3	N/A	Outside red	E14/E26/E27/B22	35	97	1000
3CF35OY	C35	110-240	3	N/A	Outside yellow	E14/E26/E27/B22	35	97	1000



Item	Type	Voltage (V)	Wattage (W)	Luminous Flux (LM)	Color	Base	Diameter	Length	Life (H)
25C35TCL	C35	110-240	25	207	Clear	E14/E26/E27/B22	35	97	1000
40C35TCL	C35	110-240	40	389	Clear	E14/E26/E27/B22	35	97	1000
60C35TCL	C35	110-240	60	654	Clear	E14/E26/E27/B22	35	97	1000



Item	Type	Voltage (V)	Wattage (W)	Luminous Flux (LM)	Color	Base	Diameter	Length	Life (H)
25C35TFR	C35	110-240	25	207	Frost	E14/E26/E27/B22	35	97	1000
40C35TFR	C35	110-240	40	389	Frost	E14/E26/E27/B22	35	97	1000
60C35TFR	C35	110-240	60	654	Frost	E14/E26/E27/B22	35	97	1000



Item	Type	Voltage (V)	Wattage (W)	Luminous Flux (LM)	Color	Base	Diameter	Length	Life (H)
25C35TGD	C35	110-240	25	207	Gold	E14/E26/E27/B22	35	97	1000
40C35TGD	C35	110-240	40	389	Gold	E14/E26/E27/B22	35	97	1000
60C35TGD	C35	110-240	60	654	Gold	E14/E26/E27/B22	35	97	1000



Item	Type	Voltage (V)	Wattage (W)	Luminous Flux (LM)	Color	Base	Diameter	Length	Life (H)
25C35TCR	C35	110-240	25	207	Color	E14/E26/E27/B22	35	97	1000
40C35TCR	C35	110-240	40	389	Color	E14/E26/E27/B22	35	97	1000
60C35TCR	C35	110-240	60	654	Color	E14/E26/E27/B22	35	97	1000



Item	Type	Voltage (V)	Wattage (W)	Luminous Flux (LM)	Color	Base	Diameter	Length	Life (H)
3CAF35CL	CA35	110-240	3	0.4	Clear	E14/E26/E27/B22	35	125	1000



Item	Type	Voltage (V)	Wattage (W)	Luminous Flux (LM)	Color	Base	Diameter	Length	Life (H)
25CA35CL	CA35	110-240	25	207	Clear	E14/E26/E27/B22	35	125	1000
40CA35CL	CA35	110-240	40	389	Clear	E14/E26/E27/B22	35	125	1000
60CA35CL	CA35	110-240	60	654	Clear	E14/E26/E27/B22	35	125	1000



Item	Type	Voltage (V)	Wattage (W)	Luminous Flux (LM)	Color	Base	Diameter	Length	Life (H)
25CA35FR	CA35	110-240	25	207	Frost	E14/E26/E27/B22	35	125	1000
40CA35FR	CA35	110-240	40	389	Frost	E14/E26/E27/B22	35	125	1000
60CA35FR	CA35	110-240	60	654	Frost	E14/E26/E27/B22	35	125	1000



Item	Type	Voltage (V)	Wattage (W)	Luminous Flux (LM)	Color	Base	Diameter	Length	Life (H)
25CA35GD	CA35	110-240	25	207	Gold	E14/E26/E27/B22	35	125	1000
40CA35GD	CA35	110-240	40	389	Gold	E14/E26/E27/B22	35	125	1000
60CA35GD	CA35	110-240	60	654	Gold	E14/E26/E27/B22	35	125	1000



Item	Type	Voltage (V)	Wattage (W)	Luminous Flux (LM)	Color	Base	Diameter	Length	Life (H)
25C41TCL	C41	110-240	25	207	Clear	E14/E26/E27/B22	41	125	1000
40C41TCL	C41	110-240	40	389	Clear	E14/E26/E27/B22	41	125	1000
60C41TCL	C41	110-240	60	654	Clear	E14/E26/E27/B22	41	125	1000



Item	Type	Voltage (V)	Wattage (W)	Luminous Flux (LM)	Color	Base	Diameter	Length	Life (H)
25C41TFR	C41	110-240	25	207	Frost	E14/E26/E27/B22	41	125	1000
40C41TFR	C41	110-240	40	389	Frost	E14/E26/E27/B22	41	125	1000
60C41TFR	C41	110-240	60	654	Frost	E14/E26/E27/B22	41	125	1000



Item	Type	Voltage (V)	Wattage (W)	Luminous Flux (LM)	Color	Base	Diameter	Length	Life (H)
25C41TGD	C41	110-240	25	207	Gold	E14/E26/E27/B22	41	125	1000
40C41TGD	C41	110-240	40	389	Gold	E14/E26/E27/B22	41	125	1000
60C41TGD	C41	110-240	60	654	Gold	E14/E26/E27/B22	41	125	1000



Item	Type	Voltage (V)	Wattage (W)	Luminous Flux (LM)	Color	Base	Diameter	Length	Life (H)
25C45CL	C45	110-240	25	207	Clear	E14/E26/E27/B22	45	120	1000
40C45CL	C45	110-240	40	389	Clear	E14/E26/E27/B22	45	120	1000
60C45CL	C45	110-240	60	654	Clear	E14/E26/E27/B22	45	120	1000



Item	Type	Voltage (V)	Wattage (W)	Luminous Flux (LM)	Color	Base	Diameter	Length	Life (H)
25C45SW	C45	110-240	25	186	Soft White	E14/E26/E27/B22	45	120	1000
40C45SW	C45	110-240	40	350	Soft White	E14/E26/E27/B22	45	120	1000
60C45SW	C45	110-240	60	580	Soft White	E14/E26/E27/B22	45	120	1000



Item	Type	Voltage (V)	Wattage (W)	Luminous Flux (LM)	Color	Base	Diameter	Length	Life (H)
25C50TCL	C50	110-240	25	207	Clear	E14/E26/E27/B22	50	140	1000
40C50TCL	C50	110-240	40	389	Clear	E14/E26/E27/B22	50	140	1000
60C50TCL	C50	110-240	60	654	Clear	E14/E26/E27/B22	50	140	1000



Item	Type	Voltage (V)	Wattage (W)	Luminous Flux (LM)	Color	Base	Diameter	Length	Life (H)
25C50TFR	C50	110-240	25	207	Frost	E14/E26/E27/B22	50	140	1000
40C50TFR	C50	110-240	40	389	Frost	E14/E26/E27/B22	50	140	1000
60C50TFR	C50	110-240	60	654	Frost	E14/E26/E27/B22	50	140	1000



Item	Type	Voltage (V)	Wattage (W)	Luminous Flux (LM)	Color	Base	Diameter	Length	Life (H)
25C63TCL	C63	110-240	25	207	Clear	E14/E26/E27/B22	63	127	1000
40C63TCL	C63	110-240	40	389	Clear	E14/E26/E27/B22	63	127	1000
60C63TCL	C63	110-240	60	654	Clear	E14/E26/E27/B22	63	127	1000

球泡系列

Globe Bulb



Item	Type	Voltage (V)	Wattage (W)	Luminous Flux (LM)	Color	Base	Diameter	Length	Life (H)
10G35CL	G35	110-240	10	60	Clear	E14/E26/E27/B22	35	56	1000



Item	Type	Voltage (V)	Wattage (W)	Luminous Flux (LM)	Color	Base	Diameter	Length	Life (H)
10G38CL	G38	110-240	10	60	Clear	E14/E26/E27/B22	38	61	1000
15G38CL	G38	110-240	15	80	Clear	E14/E26/E27/B22	38	61	1000



Item	Type	Voltage (V)	Wattage (W)	Luminous Flux (LM)	Color	Base	Diameter	Length	Life (H)
10G38FR	G38	110-240	10	60	Frost	E14/E26/E27/B22	38	61	1000
15G38FR	G38	110-240	15	80	Frost	E14/E26/E27/B22	38	61	1000



Item	Type	Voltage (V)	Wattage (W)	Luminous Flux (LM)	Color	Base	Diameter	Length	Life (H)
10G38OA	G38	110-240	10	N/A	Outside Red	E14/E26/E27/B22	38	61	1000
10G38OY	G38	110-240	10	N/A	Outside Yellow	E14/E26/E27/B22	38	61	1000
10G38OB	G38	110-240	10	N/A	Outside Blue	E14/E26/E27/B22	38	61	1000
10G38OG	G38	110-240	10	N/A	Outside Green	E14/E26/E27/B22	38	61	1000



Item	Type	Voltage (V)	Wattage (W)	Luminous Flux (LM)	Color	Base	Diameter	Length	Life (H)
15G40CL	G40	110-240	15	80	Clear	E14/E26/E27/B22	40	63	1000



Item	Type	Voltage (V)	Wattage (W)	Luminous Flux (LM)	Color	Base	Diameter	Length	Life (H)
15G400R	G40	110-240	15	N/A	Outside Red	E14/E26/E27/B22	40	63	1000
15G400Y	G40	110-240	15	N/A	Outside Yellow	E14/E26/E27/B22	40	63	1000
15G400B	G40	110-240	15	N/A	Outside Blue	E14/E26/E27/B22	40	63	1000
15G400G	G40	110-240	15	N/A	Outside Green	E14/E26/E27/B22	40	63	1000
15G400A	G40	110-240	15	N/A	Outside Amber	E14/E26/E27/B22	40	63	1000



Item	Type	Voltage (V)	Wattage (W)	Luminous Flux (LM)	Color	Base	Diameter	Length	Life (H)
15G45CL	G45	110-240	15	100	Clear	E14/E26/E27/B22	45	70	1000
25G45CL	G45	110-240	25	207	Clear	E14/E26/E27/B22	45	70	1000
40G45CL	G45	110-240	40	389	Clear	E14/E26/E27/B22	45	70	1000
60G45CL	G45	110-240	60	654	Clear	E14/E26/E27/B22	45	70	1000



Item	Type	Voltage (V)	Wattage (W)	Luminous Flux (LM)	Color	Base	Diameter	Length	Life (H)
15G45FR	G45	110-240	15	100	Frost	E14/E26/E27/B22	45	70	1000
25G45FR	G45	110-240	25	207	Frost	E14/E26/E27/B22	45	70	1000
40G45FR	G45	110-240	40	389	Frost	E14/E26/E27/B22	45	70	1000
60G45FR	G45	110-240	60	654	Frost	E14/E26/E27/B22	45	70	1000



Item	Type	Voltage (V)	Wattage (W)	Luminous Flux (LM)	Color	Base	Diameter	Length	Life (H)
15G45SW	G45	110-240	15	90	Soft White	E14/E26/E27/B22	45	70	1000
25G45SW	G45	110-240	25	186	Soft White	E14/E26/E27/B22	45	70	1000
40G45SW	G45	110-240	40	350	Soft White	E14/E26/E27/B22	45	70	1000
60G45SW	G45	110-240	60	580	Soft White	E14/E26/E27/B22	45	70	1000



Item	Type	Voltage (V)	Wattage (W)	Luminous Flux (LM)	Color	Base	Diameter	Length	Life (H)
15G45CR	G45	110-240	15	N/A	Color	E14/E26/E27/B22	45	70	1000
25G45CR	G45	110-240	25	N/A	Color	E14/E26/E27/B22	45	70	1000



Item	Type	Voltage (V)	Wattage (W)	Luminous Flux (LM)	Color	Base	Diameter	Length	Life (H)
25G45SC	G45	110-240	25	N/A	Silver Crown	E14/E26/E27/B22	45	70	1000
40G45SC	G45	110-240	40	N/A	Silver Crown	E14/E26/E27/B22	45	70	1000



Item	Type	Voltage (V)	Wattage (W)	Luminous Flux (LM)	Color	Base	Diameter	Length	Life (H)
40G50CL	G50	110-240	40	389	Clear	E14/E26/E27/B22	50	74	1000
60G50CL	G50	110-240	60	654	Clear	E14/E26/E27/B22	50	74	1000



Item	Type	Voltage (V)	Wattage (W)	Luminous Flux (LM)	Color	Base	Diameter	Length	Life (H)
40G50FR	G50	110-240	40	389	Frost	E14/E26/E27/B22	50	74	1000
60G50FR	G50	110-240	60	654	Frost	E14/E26/E27/B22	50	74	1000



Item	Type	Voltage (V)	Wattage (W)	Luminous Flux (LM)	Color	Base	Diameter	Length	Life (H)
40G50SW	G50	110-240	40	350	Soft White	E14/E26/E27/B22	50	74	1000
60G50SW	G50	110-240	60	580	Soft White	E14/E26/E27/B22	50	74	1000



Item	Type	Voltage (V)	Wattage (W)	Luminous Flux (LM)	Color	Base	Diameter	Length	Life (H)
25G60CL	G60	110-240	25	207	Clear	E14/E26/E27/B22	60	85	1000
40G60CL	G60	110-240	40	389	Clear	E14/E26/E27/B22	60	85	1000
60G60CL	G60	110-240	60	654	Clear	E14/E26/E27/B22	60	85	1000



Item	Type	Voltage (V)	Wattage (W)	Luminous Flux (LM)	Color	Base	Diameter	Length	Life (H)
25G60FR	G60	110-240	25	207	Frost	E14/E26/E27/B22	60	85	1000
40G60FR	G60	110-240	40	389	Frost	E14/E26/E27/B22	60	85	1000
60G60FR	G60	110-240	60	654	Frost	E14/E26/E27/B22	60	85	1000



Item	Type	Voltage (V)	Wattage (W)	Luminous Flux (LM)	Color	Base	Diameter	Length	Life (H)
25G60SW	G60	110-240	25	186	Soft White	E14/E26/E27/B22	60	85	1000
40G60SW	G60	110-240	40	350	Soft White	E14/E26/E27/B22	60	85	1000
60G60SW	G60	110-240	60	580	Soft White	E14/E26/E27/B22	60	85	1000



Item	Type	Voltage (V)	Wattage (W)	Luminous Flux (LM)	Color	Base	Diameter	Length	Life (H)
25G60GD	G60	110-240	25	207	Gold	E14/E26/E27/B22	60	85	1000
40G60GD	G60	110-240	40	389	Gold	E14/E26/E27/B22	60	85	1000
60G60GD	G60	110-240	60	654	Gold	E14/E26/E27/B22	60	85	1000



Item	Type	Voltage (V)	Wattage (W)	Luminous Flux (LM)	Color	Base	Diameter	Length	Life (H)
25G60ICC	G60	110-240	25	145	Ice-crystal Clear	E14/E26/E27/B22	60	85	1000
40G60ICC	G60	110-240	40	272	Ice-crystal Clear	E14/E26/E27/B22	60	85	1000
60G60ICC	G60	110-240	60	458	Ice-crystal Clear	E14/E26/E27/B22	60	85	1000



Item	Type	Voltage (V)	Wattage (W)	Luminous Flux (LM)	Color	Base	Diameter	Length	Life (H)
25G60ICA	G60	110-240	25	125	Ice-crystal Amber	E14/E26/E27/B22	60	85	1000
40G60ICA	G60	110-240	40	233	Ice-crystal Amber	E14/E26/E27/B22	60	85	1000
60G60ICA	G60	110-240	60	392	Ice-crystal Amber	E14/E26/E27/B22	60	85	1000



Item	Type	Voltage (V)	Wattage (W)	Luminous Flux (LM)	Color	Base	Diameter	Length	Life (H)
25G60KIS	G60	110-240	25	186	Kroko-ice Satin	E14/E26/E27/B22	60	85	1000
40G60KIS	G60	110-240	40	350	Kroko-ice Satin	E14/E26/E27/B22	60	85	1000
60G60KIS	G60	110-240	60	580	Kroko-ice Satin	E14/E26/E27/B22	60	85	1000



Item	Type	Voltage (V)	Wattage (W)	Luminous Flux (LM)	Color	Base	Diameter	Length	Life (H)
25G60KIG	G60	110-240	25	207	Kroko-ice Gold	E14/E26/E27/B22	60	85	1000
40G60KIG	G60	110-240	40	389	Kroko-ice Gold	E14/E26/E27/B22	60	85	1000
60G60KIG	G60	110-240	60	654	Kroko-ice Gold	E14/E26/E27/B22	60	85	1000



Item	Type	Voltage (V)	Wattage (W)	Luminous Flux (LM)	Color	Base	Diameter	Length	Life (H)
25G60TCL	G60	110-240	25	207	Clear	E14/E26/E27/B22	60	85	1000
40G60TCL	G60	110-240	40	389	Clear	E14/E26/E27/B22	60	85	1000
60G60TCL	G60	110-240	60	654	Clear	E14/E26/E27/B22	60	85	1000



Item	Type	Voltage (V)	Wattage (W)	Luminous Flux (LM)	Color	Base	Diameter	Length	Life (H)
40G80CL	G80	110-240	40	389	Clear	E26/E27/B22	80	114	1000
60G80CL	G80	110-240	60	654	Clear	E26/E27/B22	80	114	1000



Item	Type	Voltage (V)	Wattage (W)	Luminous Flux (LM)	Color	Base	Diameter	Length	Life (H)
40G80FR	G80	110-240	40	389	Frost	E26/E27/B22	80	114	1000
60G80FR	G80	110-240	60	654	Frost	E26/E27/B22	80	114	1000



Item	Type	Voltage (V)	Wattage (W)	Luminous Flux (LM)	Color	Base	Diameter	Length	Life (H)
40G80SW	G80	110-240	40	350	Soft White	E26/E27/B22	80	114	1000
60G80SW	G80	110-240	60	580	Soft White	E26/E27/B22	80	114	1000



Item	Type	Voltage (V)	Wattage (W)	Luminous Flux (LM)	Color	Base	Diameter	Length	Life (H)
40G80GD	G80	110-240	40	389	Gold	E26/E27/B22	80	114	1000
60G80GD	G80	110-240	60	654	Gold	E26/E27/B22	80	114	1000



Item	Type	Voltage (V)	Wattage (W)	Luminous Flux (LM)	Color	Base	Diameter	Length	Life (H)
40G80KIG	G80	110-240	40	389	Kroko-ice Gold	E26/E27/B22	80	114	1000
60G80KIG	G80	110-240	60	654	Kroko-ice Gold	E26/E27/B22	80	114	1000



Item	Type	Voltage (V)	Wattage (W)	Luminous Flux (LM)	Color	Base	Diameter	Length	Life (H)
40G80ICC	G80	110-240	40	272	Ice-crystal Clear	E26/E27/B22	80	114	1000
60G80ICC	G80	110-240	60	458	Ice-crystal Clear	E26/E27/B22	80	114	1000



Item	Type	Voltage (V)	Wattage (W)	Luminous Flux (LM)	Color	Base	Diameter	Length	Life (H)
40G80ICA	G80	110-240	40	233	Ice-crystal Amber	E26/E27/B22	80	114	1000
60G80ICA	G80	110-240	60	392	Ice-crystal Amber	E26/E27/B22	80	114	1000



Item	Type	Voltage (V)	Wattage (W)	Luminous Flux (LM)	Color	Base	Diameter	Length	Life (H)
40G95CL	G95	110-240	40	389	Clear	E26/E27/B22	95	135	1000
60G95CL	G95	110-240	60	654	Clear	E26/E27/B22	95	135	1000
100G95CL	G95	110-240	100	1250	Clear	E26/E27/B22	95	135	1000



Item	Type	Voltage (V)	Wattage (W)	Luminous Flux (LM)	Color	Base	Diameter	Length	Life (H)
40G95FR	G95	110-240	40	389	Frost	E26/E27/B22	95	135	1000
60G95FR	G95	110-240	60	654	Frost	E26/E27/B22	95	135	1000
100G95FR	G95	110-240	100	1250	Frost	E26/E27/B22	95	135	1000



Item	Type	Voltage (V)	Wattage (W)	Luminous Flux (LM)	Color	Base	Diameter	Length	Life (H)
40G95SW	G95	110-240	40	350	Soft White	E26/E27/B22	95	135	1000
60G95SW	G95	110-240	60	580	Soft White	E26/E27/B22	95	135	1000
100G95SW	G95	110-240	100	1125	Soft White	E26/E27/B22	95	135	1000



Item	Type	Voltage (V)	Wattage (W)	Luminous Flux (LM)	Color	Base	Diameter	Length	Life (H)
40G95GD	G95	110-240	40	389	Gold	E26/E27/B22	95	135	1000
60G95GD	G95	110-240	60	654	Gold	E26/E27/B22	95	135	1000
100G95GD	G95	110-240	100	1250	Gold	E26/E27/B22	95	135	1000



Item	Type	Voltage (V)	Wattage (W)	Luminous Flux (LM)	Color	Base	Diameter	Length	Life (H)
40G95ICC	G95	110-240	40	272	Ice-crystal Clear	E26/E27/B22	95	135	1000
60G95ICC	G95	110-240	60	458	Ice-crystal Clear	E26/E27/B22	95	135	1000
100G95ICC	G95	110-240	100	875	Ice-crystal Clear	E26/E27/B22	95	135	1000



Item	Type	Voltage (V)	Wattage (W)	Luminous Flux (LM)	Color	Base	Diameter	Length	Life (H)
40G95ICA	G95	110-240	40	233	Ice-crystal Amber	E26/E27/B22	95	135	1000
60G95ICA	G95	110-240	60	392	Ice-crystal Amber	E26/E27/B22	95	135	1000
100G95ICA	G95	110-240	100	750	Ice-crystal Amber	E26/E27/B22	95	135	1000



Item	Type	Voltage (V)	Wattage (W)	Luminous Flux (LM)	Color	Base	Diameter	Length	Life (H)
40G95KIS	G95	110-240	40	350	Kroko-ice Satin	E26/E27/B22	95	135	1000
60G95KIS	G95	110-240	60	580	Kroko-ice Satin	E26/E27/B22	95	135	1000
100G95KIS	G95	110-240	100	1125	Kroko-ice Satin	E26/E27/B22	95	135	1000



Item	Type	Voltage (V)	Wattage (W)	Luminous Flux (LM)	Color	Base	Diameter	Length	Life (H)
40G95KIG	G95	110-240	40	389	Kroko-ice Gold	E26/E27/B22	95	135	1000
60G95KIG	G95	110-240	60	654	Kroko-ice Gold	E26/E27/B22	95	135	1000
100G95KIG	G95	110-240	100	1250	Kroko-ice Gold	E26/E27/B22	95	135	1000



Item	Type	Voltage (V)	Wattage (W)	Luminous Flux (LM)	Color	Base	Diameter	Length	Life (H)
60G95SC	G95	110-240	60	N/A	Silver Crown	E26/E27/B22	95	135	1000
60G95SR	G95	110-240	60	654	Silver Ring	E26/E27/B22	95	135	1000



Item	Type	Voltage (V)	Wattage (W)	Luminous Flux (LM)	Color	Base	Diameter	Length	Life (H)
40G125CL	G125	110-240	40	389	Clear	E26/E27/B22	125	170	1000
60G125CL	G125	110-240	60	654	Clear	E26/E27/B22	125	170	1000
75G125CL	G125	110-240	75	864	Clear	E26/E27/B22	125	170	1000
100G125CL	G125	110-240	100	1250	Clear	E26/E27/B22	125	170	1000



Item	Type	Voltage (V)	Wattage (W)	Luminous Flux (LM)	Color	Base	Diameter	Length	Life (H)
40G125SW	G125	110-240	40	350	Soft white	E26/E27/B22	125	170	1000
60G125SW	G125	110-240	60	580	Soft white	E26/E27/B22	125	170	1000
75G125SW	G125	110-240	75	777	Soft white	E26/E27/B22	125	170	1000
100G125SW	G125	110-240	100	1125	Soft white	E26/E27/B22	125	170	1000



Item	Type	Voltage (V)	Wattage (W)	Luminous Flux (LM)	Color	Base	Diameter	Length	Life (H)
40G125ICC	G125	110-240	40	272	Ice-crystal Clear	E26/E27/B22	125	170	1000
60G125ICC	G125	110-240	60	458	Ice-crystal Clear	E26/E27/B22	125	170	1000
75G125ICC	G125	110-240	75	605	Ice-crystal Clear	E26/E27/B22	125	170	1000
100G125ICC	G125	110-240	100	875	Ice-crystal Clear	E26/E27/B22	125	170	1000



Item	Type	Voltage (V)	Wattage (W)	Luminous Flux (LM)	Color	Base	Diameter	Length	Life (H)
40G125ICA	G125	110-240	40	233	Ice-crystal Amber	E26/E27/B22	125	170	1000
60G125ICA	G125	110-240	60	392	Ice-crystal Amber	E26/E27/B22	125	170	1000
75G125ICA	G125	110-240	75	518	Ice-crystal Amber	E26/E27/B22	125	170	1000
100G125ICA	G125	110-240	100	750	Ice-crystal Amber	E26/E27/B22	125	170	1000



Item	Type	Voltage (V)	Wattage (W)	Luminous Flux (LM)	Color	Base	Diameter	Length	Life (H)
40G125KIC	G125	110-240	40	389	Kroko-ice Clear	E26/E27/B22	125	170	1000
60G125KIC	G125	110-240	60	654	Kroko-ice Clear	E26/E27/B22	125	170	1000
75G125KIC	G125	110-240	75	864	Kroko-ice Clear	E26/E27/B22	125	170	1000
100G125KIC	G125	110-240	100	1250	Kroko-ice Clear	E26/E27/B22	125	170	1000



Item	Type	Voltage (V)	Wattage (W)	Luminous Flux (LM)	Color	Base	Diameter	Length	Life (H)
40G125KIG	G125	110-240	40	389	Kroko-ice Gold	E26/E27/B22	125	170	1000
60G125KIG	G125	110-240	60	654	Kroko-ice Gold	E26/E27/B22	125	170	1000
75G125KIG	G125	110-240	75	864	Kroko-ice Gold	E26/E27/B22	125	170	1000
100G125KIG	G125	110-240	100	1250	Kroko-ice Gold	E26/E27/B22	125	170	1000



Item	Type	Voltage (V)	Wattage (W)	Luminous Flux (LM)	Color	Base	Diameter	Length	Life (H)
60G125SC	G125	110-240	60	N/A	Silver Crown	E26/E27/B22	125	170	1000
60G125SR	G125	110-240	60	654	Silver Ring	E26/E27/B22	125	170	1000

反射泡系列

Refelctor Bulb



Item	Type	Voltage (V)	Wattage (W)	Luminous Flux (LM)	Color	Base	Diameter	Length	Life (H)
30R39CL	R39	110-240	30	N/A	Clear	E14	39	66	1000



Item	Type	Voltage (V)	Wattage (W)	Luminous Flux (LM)	Color	Base	Diameter	Length	Life (H)
30R39FR	R39	110-240	30	N/A	Frost	E14	39	66	1000
40R39FR	R39	110-240	40	N/A	Frost	E14	39	66	1000



Item	Type	Voltage (V)	Wattage (W)	Luminous Flux (LM)	Color	Base	Diameter	Length	Life (H)
25R39OR	R39	110-240	25	N/A	Outside Red	E14	39	66	1000
25R39OY	R39	110-240	25	N/A	Outside Yellow	E14	39	66	1000
25R39OB	R39	110-240	25	N/A	Outside Blue	E14	39	66	1000
25R39OG	R39	110-240	25	N/A	Outside Green	E14	39	66	1000



Item	Type	Voltage (V)	Wattage (W)	Luminous Flux (LM)	Color	Base	Diameter	Length	Life (H)
40R45FR	R45	110-240	40	N/A	Frost	E26/E27/B22	45	50	1000



Item	Type	Voltage (V)	Wattage (W)	Luminous Flux (LM)	Color	Base	Diameter	Length	Life (H)
40R45OR	R45	110-240	40	N/A	Outside Red	E26/E27/B22	45	50	1000
40R45OY	R45	110-240	40	N/A	Outside Yellow	E26/E27/B22	45	50	1000
40R45OB	R45	110-240	40	N/A	Outside Blue	E26/E27/B22	45	50	1000
40R45OG	R45	110-240	40	N/A	Outside Green	E26/E27/B22	45	50	1000



Item	Type	Voltage (V)	Wattage (W)	Luminous Flux (LM)	Color	Base	Diameter	Length	Life (H)
25R50CL	R50	110-240	25	N/A	Clear	E14	50	85	1000
40R50CL	R50	110-240	40	N/A	Clear	E14	50	85	1000
60R50CL	R50	110-240	60	N/A	Clear	E14	50	85	1000



Item	Type	Voltage (V)	Wattage (W)	Luminous Flux (LM)	Color	Base	Diameter	Length	Life (H)
25R50FR	R50	110-240	25	N/A	Frost	E14	50	85	1000
40R50FR	R50	110-240	40	N/A	Frost	E14	50	85	1000
60R50FR	R50	110-240	60	N/A	Frost	E14	50	85	1000



Item	Type	Voltage (V)	Wattage (W)	Luminous Flux (LM)	Color	Base	Diameter	Length	Life (H)
40R50CS	R50	110-240	40	N/A	Clear Spot	E14	50	85	1000



Item	Type	Voltage (V)	Wattage (W)	Luminous Flux (LM)	Color	Base	Diameter	Length	Life (H)
40R50F5	R50	110-240	40	N/A	Frost Spot	E14	50	85	1000



Item	Type	Voltage (V)	Wattage (W)	Luminous Flux (LM)	Color	Base	Diameter	Length	Life (H)
25R50OR	R50	110-240	25	N/A	Outside Red	E14	50	85	1000
25R50OY	R50	110-240	25	N/A	Outside Yellow	E14	50	85	1000
25R50OB	R50	110-240	25	N/A	Outside Blue	E14	50	85	1000
25R50OG	R50	110-240	25	N/A	Outside Green	E14	50	85	1000



Item	Type	Voltage (V)	Wattage (W)	Luminous Flux (LM)	Color	Base	Diameter	Length	Life (H)
40R50AL	R50	110-240	40	N/A	Alu	E14	50	85	1000
40R50FC	R50	110-240	40	N/A	Full Chrome	E14	50	85	1000
40R50FG	R50	110-240	40	N/A	Full Gold	E14	50	85	1000
40R50BK	R50	110-240	40	N/A	Black	E14	50	85	1000



Item	Type	Voltage (V)	Wattage (W)	Luminous Flux (LM)	Color	Base	Diameter	Length	Life (H)
40M50FR	M50	110-240	40	350	Frost	E26/E27/B22	50	85	1000
60M50FR	M50	110-240	60	580	Frost	E26/E27/B22	50	85	1000



Item	Type	Voltage (V)	Wattage (W)	Luminous Flux (LM)	Color	Base	Diameter	Length	Life (H)
40M50SW	M50	110-240	40	350	Soft White	E26/E27/B22	50	85	1000
60M50SW	M50	110-240	60	580	Soft White	E26/E27/B22	50	85	1000



Item	Type	Voltage (V)	Wattage (W)	Luminous Flux (LM)	Color	Base	Diameter	Length	Life (H)
40M50IR	M50	110-240	40	N/A	Inside Red	E26/E27/B22	50	85	1000
40M50IY	M50	110-240	40	N/A	Inside Yellow	E26/E27/B22	50	85	1000
40M50IB	M50	110-240	40	N/A	Inside Blue	E26/E27/B22	50	85	1000
40M50IG	M50	110-240	40	N/A	Inside Green	E26/E27/B22	50	85	1000
40M50IA	M50	110-240	40	N/A	Inside Amber	E26/E27/B22	50	85	1000



Item	Type	Voltage (V)	Wattage (W)	Luminous Flux (LM)	Color	Base	Diameter	Length	Life (H)
40M60SW	M60	110-240	40	350	Soft White	E26/E27/B22	60	99	1000
60M60SW	M60	110-240	60	580	Soft White	E26/E27/B22	60	99	1000



Item	Type	Voltage (V)	Wattage (W)	Luminous Flux (LM)	Color	Base	Diameter	Length	Life (H)
40R63CL	R63	110-240	40	N/A	Clear	E26/E27/B22	63	102	1000
60R63CL	R63	110-240	60	N/A	Clear	E26/E27/B22	63	102	1000
75R63CL	R63	110-240	75	N/A	Clear	E26/E27/B22	63	102	1000



Item	Type	Voltage (V)	Wattage (W)	Luminous Flux (LM)	Color	Base	Diameter	Length	Life (H)
40R63FR	R63	110-240	40	N/A	Frost	E26/E27/B22	63	102	1000
60R63FR	R63	110-240	60	N/A	Frost	E26/E27/B22	63	102	1000
75R63FR	R63	110-240	75	N/A	Frost	E26/E27/B22	63	102	1000



Item	Type	Voltage (V)	Wattage (W)	Luminous Flux (LM)	Color	Base	Diameter	Length	Life (H)
60R63CS	R63	110-240	60	N/A	Clear Spot	E26/E27/B22	63	102	1000



Item	Type	Voltage (V)	Wattage (W)	Luminous Flux (LM)	Color	Base	Diameter	Length	Life (H)
40R63FG	R63	110-240	40	N/A	Full Gold	E26/E27/B22	63	102	1000
60R63FG	R63	110-240	60	N/A	Full Gold	E26/E27/B22	63	102	1000



Item	Type	Voltage (V)	Wattage (W)	Luminous Flux (LM)	Color	Base	Diameter	Length	Life (H)
40R63OR	R63	110-240	40	N/A	Outside Red	E26/E27/B22	63	102	1000
40R63OY	R63	110-240	40	N/A	Outside Yellow	E26/E27/B22	63	102	1000
40R63OB	R63	110-240	40	N/A	Outside Blue	E26/E27/B22	63	102	1000
40R63OG	R63	110-240	40	N/A	Outside Green	E26/E27/B22	63	102	1000



Item	Type	Voltage (V)	Wattage (W)	Luminous Flux (LM)	Color	Base	Diameter	Length	Life (H)
40R63B	R63	110-240	40	N/A	Blue	E26/E27/B22	63	102	1000
60R63B	R63	110-240	60	N/A	Blue	E26/E27/B22	63	102	1000



Item	Type	Voltage (V)	Wattage (W)	Luminous Flux (LM)	Color	Base	Diameter	Length	Life (H)
40R80CL	R80	110-240	40	N/A	Clear	E26/E27/B22	80	115	1000
60R80CL	R80	110-240	60	N/A	Clear	E26/E27/B22	80	115	1000



Item	Type	Voltage (V)	Wattage (W)	Luminous Flux (LM)	Color	Base	Diameter	Length	Life (H)
40R80FR	R80	110-240	40	N/A	Frost	E26/E27/B22	80	115	1000
60R80FR	R80	110-240	60	N/A	Frost	E26/E27/B22	80	115	1000
75R80FR	R80	110-240	75	N/A	Frost	E26/E27/B22	80	115	1000
100R80FR	R80	110-240	100	N/A	Frost	E26/E27/B22	80	115	1000



Item	Type	Voltage (V)	Wattage (W)	Luminous Flux (LM)	Color	Base	Diameter	Length	Life (H)
60R80OR	R80	110-240	60	N/A	Outside Red	E26/E27/B22	80	115	1000
60R80OY	R80	110-240	60	N/A	Outside Yellow	E26/E27/B22	80	115	1000
60R80OB	R80	110-240	60	N/A	Outside Blue	E26/E27/B22	80	115	1000
60R80OG	R80	110-240	60	N/A	Outside Green	E26/E27/B22	80	115	1000



Item	Type	Voltage (V)	Wattage (W)	Luminous Flux (LM)	Color	Base	Diameter	Length	Life (H)
60R80B	R80	110-240	60	N/A	Blue	E26/E27/B22	80	115	1000
75R80B	R80	110-240	75	N/A	Blue	E26/E27/B22	80	115	1000



Item	Type	Voltage (V)	Wattage (W)	Luminous Flux (LM)	Color	Base	Diameter	Length	Life (H)
75R80BL	R80	110-240	75	N/A	Blacklight	E26/E27/B22	80	115	1000



Item	Type	Voltage (V)	Wattage (W)	Luminous Flux (LM)	Color	Base	Diameter	Length	Life (H)
75R90FR	R90	110-240	75	N/A	Frost	E26/E27/B22	90	128	1000
100R90FR	R90	110-240	100	N/A	Frost	E26/E27/B22	90	128	1000



Item	Type	Voltage (V)	Wattage (W)	Luminous Flux (LM)	Color	Base	Diameter	Length	Life (H)
75R95CL	R95	110-240	75	N/A	Clear	E26/E27/B22	95	134	1000



Item	Type	Voltage (V)	Wattage (W)	Luminous Flux (LM)	Color	Base	Diameter	Length	Life (H)
75R95FR	R95	110-240	75	N/A	Frost	E26/E27/B22	95	134	1000



Item	Type	Voltage (V)	Wattage (W)	Luminous Flux (LM)	Color	Base	Diameter	Length	Life (H)
75R95B	R95	110-240	75	N/A	Blue	E26/E27/B22	95	134	1000
100R95B	R95	110-240	100	N/A	Blue	E26/E27/B22	95	134	1000



Item	Type	Voltage (V)	Wattage (W)	Luminous Flux (LM)	Color	Base	Diameter	Length	Life (H)
125R125CL	R125	110-240	125	N/A	Clear	E26/E27/B22	125	165	5000
250R125CL	R125	110-240	250	N/A	Clear	E26/E27/B22	125	165	5000
375R125CL	R125	110-240	375	N/A	Clear	E26/E27/B22	125	165	5000



Item	Type	Voltage (V)	Wattage (W)	Luminous Flux (LM)	Color	Base	Diameter	Length	Life (H)
125R125FR	R125	110-240	125	N/A	Frost	E26/E27/B22	125	165	5000
250R125FR	R125	110-240	250	N/A	Frost	E26/E27/B22	125	165	5000
375R125FR	R125	110-240	375	N/A	Frost	E26/E27/B22	125	165	5000



Item	Type	Voltage (V)	Wattage (W)	Luminous Flux (LM)	Color	Base	Diameter	Length	Life (H)
250R125RD	R125	110-240	250	N/A	Red	E26/E27/B22	125	165	5000



Item	Type	Voltage (V)	Wattage (W)	Luminous Flux (LM)	Color	Base	Diameter	Length	Life (H)
60BR30CL	BR30	110-240	60	N/A	Clear	E26/E27/B22	95	128	2000
65BR30CL	BR30	110-240	65	N/A	Clear	E26/E27/B22	95	128	2000
100BR30CL	BR30	110-240	100	N/A	Clear	E26/E27/B22	95	128	2000



Item	Type	Voltage (V)	Wattage (W)	Luminous Flux (LM)	Color	Base	Diameter	Length	Life (H)
45BR30FR	BR30	110-240	45	N/A	Frost	E26/E27/B22	95	128	2000
65BR30FR	BR30	110-240	65	N/A	Frost	E26/E27/B22	95	128	2000



Item	Type	Voltage (V)	Wattage (W)	Luminous Flux (LM)	Color	Base	Diameter	Length	Life (H)
75BR30OR	BR30	110-240	75	N/A	Outside Red	E26/E27/B22	95	136	2000
75BR30OA	BR30	110-240	75	N/A	Outside Amber	E26/E27/B22	95	136	2000
75BR30OB	BR30	110-240	75	N/A	Outside Blue	E26/E27/B22	95	136	2000
75BR30OG	BR30	110-240	75	N/A	Outside Green	E26/E27/B22	95	136	2000
75BR30OP	BR30	110-240	75	N/A	Outside Pink	E26/E27/B22	95	136	2000



Item	Type	Voltage (V)	Wattage (W)	Luminous Flux (LM)	Color	Base	Diameter	Length	Life (H)
150BR38CL	BR38	110-240	150	N/A	Clear	E26/E27/B22	120	146	5000



Item	Type	Voltage (V)	Wattage (W)	Luminous Flux (LM)	Color	Base	Diameter	Length	Life (H)
100BR38OR	BR38	110-240	100	N/A	Outside Red	E26/E27/B22	120	146	5000
100BR38OA	BR38	110-240	100	N/A	Outside Amber	E26/E27/B22	120	146	5000
100BR38OB	BR38	110-240	100	N/A	Outside Blue	E26/E27/B22	120	146	5000
100BR38OG	BR38	110-240	100	N/A	Outside Green	E26/E27/B22	120	146	5000
100BR38OP	BR38	110-240	100	N/A	Outside Pink	E26/E27/B22	120	146	5000



Item	Type	Voltage (V)	Wattage (W)	Luminous Flux (LM)	Color	Base	Diameter	Length	Life (H)
65BR40CL	BR40	110-240	65	N/A	Clear	E26/E27/B22	125	172	2000
75BR40CL	BR40	110-240	75	N/A	Clear	E26/E27/B22	125	172	2000
100BR40CL	BR40	110-240	100	N/A	Clear	E26/E27/B22	125	172	2000
150BR40CL	BR40	110-240	150	N/A	Clear	E26/E27/B22	125	172	2000
250BR40CL	BR40	110-240	250	N/A	Clear	E26/E27/B22	125	172	2000



Item	Type	Voltage (V)	Wattage (W)	Luminous Flux (LM)	Color	Base	Diameter	Length	Life (H)
65BR40FR	BR40	110-240	65	N/A	Frost	E26/E27/B22	125	172	2000
75BR40FR	BR40	110-240	75	N/A	Frost	E26/E27/B22	125	172	2000
100BR40FR	BR40	110-240	100	N/A	Frost	E26/E27/B22	125	172	2000
150BR40FR	BR40	110-240	150	N/A	Frost	E26/E27/B22	125	172	2000
250BR40FR	BR40	110-240	250	N/A	Frost	E26/E27/B22	125	172	2000



Item	Type	Voltage (V)	Wattage (W)	Luminous Flux (LM)	Color	Base	Diameter	Length	Life (H)
25C35RCL	C35	110-240	25	100	Clear	E12/E14/E27/B22	35	101	1000
40C35RCL	C35	110-240	40	230	Clear	E12/E14/E27/B22	35	101	1000

(8ACR)



Item	Type	Voltage (V)	Wattage (W)	Luminous Flux (LM)	Color	Base	Diameter	Length	Life (H)
25C35TRCL	C35	110-240	25	100	Clear	E12/E14/E27/B22	35	101	1000
40C35TRCL	C35	110-240	40	230	Clear	E12/E14/E27/B22	35	101	1000

(8ACR)



Item	Type	Voltage (V)	Wattage (W)	Luminous Flux (LM)	Color	Base	Diameter	Length	Life (H)
25CA35RCL	CA35	110-240	25	100	Clear	E12/E14/E27/B22	35	125	1000
40CA35RCL	CA35	110-240	40	230	Clear	E12/E14/E27/B22	35	125	1000

(8ACR)



Item	Type	Voltage (V)	Wattage (W)	Luminous Flux (LM)	Color	Base	Diameter	Length	Life (H)
40C45TRCL	C45	110-240	40	230	Clear	E27/B22	45	120	1000
60C45TRCL	C45	110-240	60	440	Clear	E27/B22	45	120	1000

(8ACR)



Item	Type	Voltage (V)	Wattage (W)	Luminous Flux (LM)	Color	Base	Diameter	Length	Life (H)
40A60RCL	A60	110-240	40	230	Clear	E27/B22	60	110	1000
60A60RCL	A60	110-240	60	440	Clear	E27/B22	60	110	1000

(8ACR)



Item	Type	Voltage (V)	Wattage (W)	Luminous Flux (LM)	Color	Base	Diameter	Length	Life (H)
60A60RCL	A60	110-240	60	190	Clear	E27/B22	60	106	1000

(15ACR)



Item	Type	Voltage (V)	Wattage (W)	Luminous Flux (LM)	Color	Base	Diameter	Length	Life (H)
25T20RCL	T20	110-240	25	90	Clear	E14/BA15D	20	114	1000
40T20RCL	T20	110-240	40	250	Clear	E14/BA15D	20	114	1000

(10ACR)



Item	Type	Voltage (V)	Wattage (W)	Luminous Flux (LM)	Color	Base	Diameter	Length	Life (H)
40T45RCL	T45	110-240	40	230	Clear	E27/B22	45	110	1000
60T45RCL	T45	110-240	60	470	Clear	E27/B22	45	110	1000

(12ACR)



Item	Type	Voltage (V)	Wattage (W)	Luminous Flux (LM)	Color	Base	Diameter	Length	Life (H)
40T45RCL	T45	110-240	40	210	Clear	E27/B22	45	110	1000
60T45RCL	T45	110-240	60	360	Clear	E27/B22	45	110	1000

(20ACR)



Item	Type	Voltage (V)	Wattage (W)	Luminous Flux (LM)	Color	Base	Diameter	Length	Life (H)
40T45RCL	T45	110-240	40	210	Clear	E27/B22	45	110	1000
60T45RCL	T45	110-240	60	360	Clear	E27/B22	45	110	1000

(60ACR)



Item	Type	Voltage (V)	Wattage (W)	Luminous Flux (LM)	Color	Base	Diameter	Length	Life (H)
40S60RCL	S60	110-240	40	220	Clear	E27/B22	60	135	1000
60S60RCL	S60	110-240	60	480	Clear	E27/B22	60	135	1000

(19ACR)



Item	Type	Voltage (V)	Wattage (W)	Luminous Flux (LM)	Color	Base	Diameter	Length	Life (H)
40S65RCL	S65	110-240	40	220	Clear	E27/B22	65	140	1000
60S65RCL	S65	110-240	60	480	Clear	E27/B22	65	140	1000

(19ACR)



Item	Type	Voltage (V)	Wattage (W)	Luminous Flux (LM)	Energy Rating	Color	Base	Diameter	Length	Life (H)
18A19CL	A19	110-240	18	204	C	Clear	E26/E27/B22	60	105	2000
28A19CL	A19	110-240	28	370	C	Clear	E26/E27/B22	60	105	2000
42A19CL	A19	110-240	42	624	C	Clear	E26/E27/B22	60	105	2000
52A19CL	A19	110-240	52	815	C	Clear	E26/E27/B22	60	105	2000
70A19CL	A19	110-240	70	1172	C	Clear	E26/E27/B22	60	105	2000



Item	Type	Voltage (V)	Wattage (W)	Luminous Flux (LM)	Energy Rating	Color	Base	Diameter	Length	Life (H)
18C35CL	C35	110-240	18	204	C	Clear	E12/E14/E26/E27/B22	35	97	2000
28C35CL	C35	110-240	28	370	C	Clear	E12/E14/E26/E27/B22	35	97	2000
42C35CL	C35	110-240	42	624	C	Clear	E12/E14/E26/E27/B22	35	97	2000



Item	Type	Voltage (V)	Wattage (W)	Luminous Flux (LM)	Energy Rating	Color	Base	Diameter	Length	Life (H)
18CA35CL	CA35	110-240	18	204	C	Clear	E12/E14/E26/E27/B22	35	125	2000
28CA35CL	CA35	110-240	28	370	C	Clear	E12/E14/E26/E27/B22	35	125	2000
42CA35CL	CA35	110-240	42	624	C	Clear	E12/E14/E26/E27/B22	35	125	2000



Item	Type	Voltage (V)	Wattage (W)	Luminous Flux (LM)	Energy Rating	Color	Base	Diameter	Length	Life (H)
18G45CL	G45	110-240	18	204	C	Clear	E12/E14/E26/E27/B22	45	71	2000
28G45CL	G45	110-240	28	370	C	Clear	E12/E14/E26/E27/B22	45	71	2000
42G45CL	G45	110-240	42	624	C	Clear	E12/E14/E26/E27/B22	45	71	2000



Item	Type	Voltage (V)	Wattage (W)	Luminous Flux (LM)	Energy Rating	Color	Base	Diameter	Length	Life (H)
18R50CL	R50	110-240	18	N/A	C	Clear	E14	50	85	2000
28R50CL	R50	110-240	28	N/A	C	Clear	E14	50	85	2000
42R50CL	R50	110-240	42	N/A	C	Clear	E14	50	85	2000



Item	Type	Voltage (V)	Wattage (W)	Luminous Flux (LM)	Energy Rating	Color	Base	Diameter	Length	Life (H)
18R63CL	R63	110-240	18	N/A	C	Clear	E26/E27/B22	63	102	2000
28R63CL	R63	110-240	28	N/A	C	Clear	E26/E27/B22	63	102	2000
42R63CL	R63	110-240	42	N/A	C	Clear	E26/E27/B22	63	102	2000
52R63CL	R63	110-240	52	N/A	C	Clear	E26/E27/B22	63	102	2000

艺术泡系列

Craft Bulb

火焰泡系列

Flame Bulb



Item	Type	Voltage (V)	Wattage (W)	Luminous Flux (LM)	Color	Base	Diameter	Length	Life (H)
15A19CR	A19	110-240	15	N/A	Color	E26/E27/B22	60	105	1000
25A19CR	A19	110-240	25	N/A	Color	E26/E27/B22	60	105	1000
40A19CR	A19	110-240	40	N/A	Color	E26/E27/B22	60	105	1000



Item	Type	Voltage (V)	Wattage (W)	Luminous Flux (LM)	Color	Base	Diameter	Length	Life (H)
3GF80CL	GF80	110-240	3	0.4	Clear	E26/E27/B22	80	114	1000


A-LINE



CANDLELABRA



TUBULARS

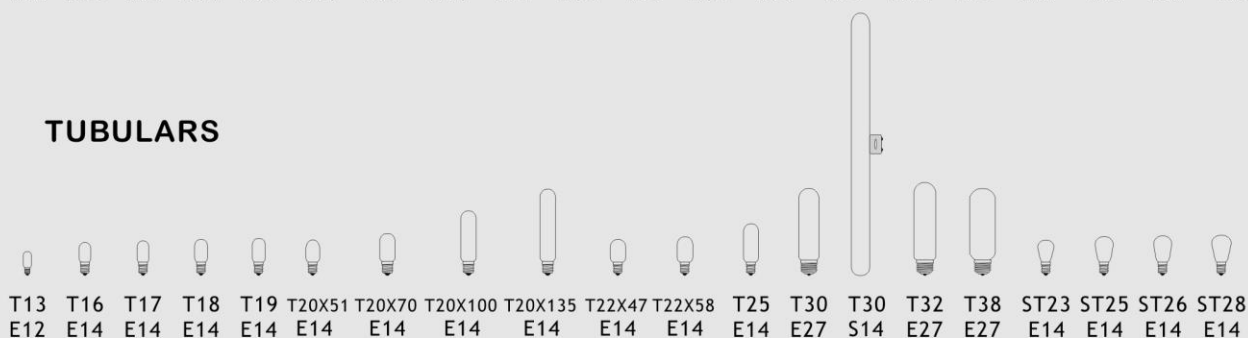


REFLECTORS



GLOBES



BASES

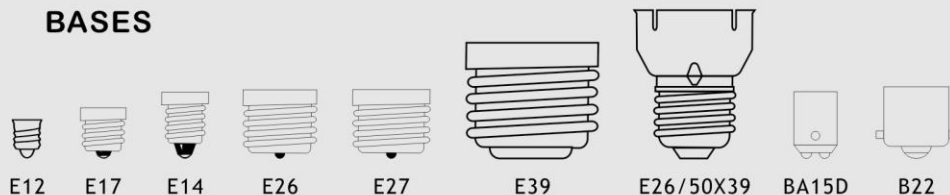

*Dinlite*TM

德清鼎辉照明有限公司
DEQING DINGHUI LIGHT CO.,LTD.

No.60,YiXi Road,Qianyuan Town,Deqing County,
Zhejiang,China.

Tel:0086-572-8424296 Fax:0086-572-8423896

E-mail:zhshy2008@126.com

Http://www.dinlite.com